


ท่อส้นหน้างานปลายเรียบ

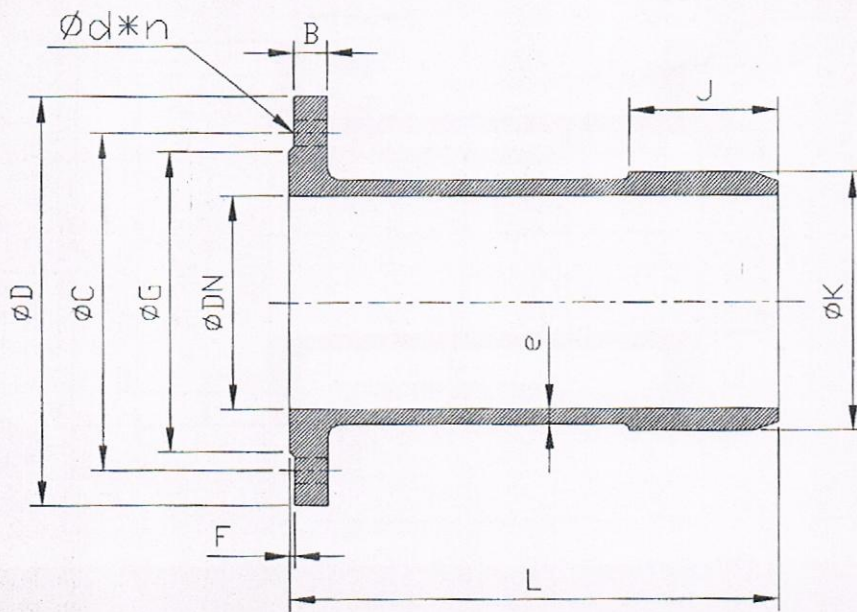

DN	ϕD	ϕC	ϕG	B	F	ϕd	n	K	J	e	L
80	200	160	133	21	3	19	8	98	103±2	10	400
100	220	180	153	22	3	19	8	120	103±2	10.5	400
150	285	240	209	23	3	23	8	176	103±2	11.7	400
200	340	295	264	24.5	3	23	8	234	103±2	12.8	500
250	395	350	319	26	3	23	12	288	103±2	14.0	500
300	445	400	367	27.5	4	23	12	344	103±2	15.2	500
400	565	515	477	30	4	28	16	460	103±2	17.5	500
500	670	620	582	33	4	28	20	580	103±2	19.8	500
600	780	725	682	36	5	31	20	694	103±2	22.2	600