


# WEKSLER Adjustable Angle Digital Thermometer

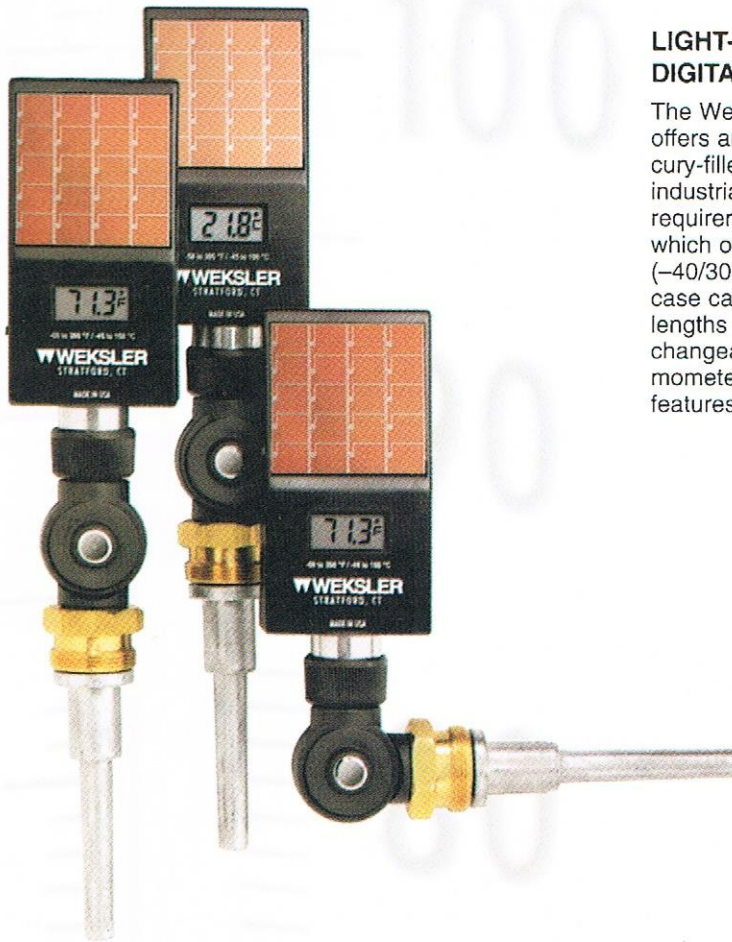

## LIGHT-POWERED ADJUSTABLE ANGLE DIGITAL THERMOMETER

The Weksler™ light-powered industrial thermometer offers an environmentally friendly alternative to mercury-filled industrial thermometers. The light-powered industrial thermometer can help reduce inventory requirements with its switchable °F and °C feature, which offers a wide variety of ranges in a single unit (-40/300°F and -40°/150°C). The high impact ABS case can be adjusted for viewing from any angle. Stem lengths of 3½" and 6" are available and are interchangeable with standard glass column industrial thermometers. The light-powered industrial thermometer features a ½" LCD digital display.

### SPECIFICATIONS

- Switchable Range:**  
-40/300°F - -40/150°C
- Accuracy:**  
1% of reading or 1° whichever is greater
- Display:**  
½" LCD digits
- Resolution:**  
¼° between -19.9/199.9°F or 28/93°C
- Update Rate:**  
10 seconds
- Recalibration:**  
Internal potentiometer
- Sensor:**  
Glass passivator thermistor


### ACCESSORIES

**Thermowells For Adjustable Angle Thermometers:**  
See page 5

### PHYSICAL CHARACTERISTICS

- Case:**  
High-impact ABS
- Stem Assemblies, Industrial Glass:**  
Full conformance with Fed. Spec. GGT-321D
- Stem Lengths:**  
3½" and 6"
- Standard Connection:**  
1¼"-18 NEF Swivel Nut
- Weight:** 10 oz.

### DIMENSIONS

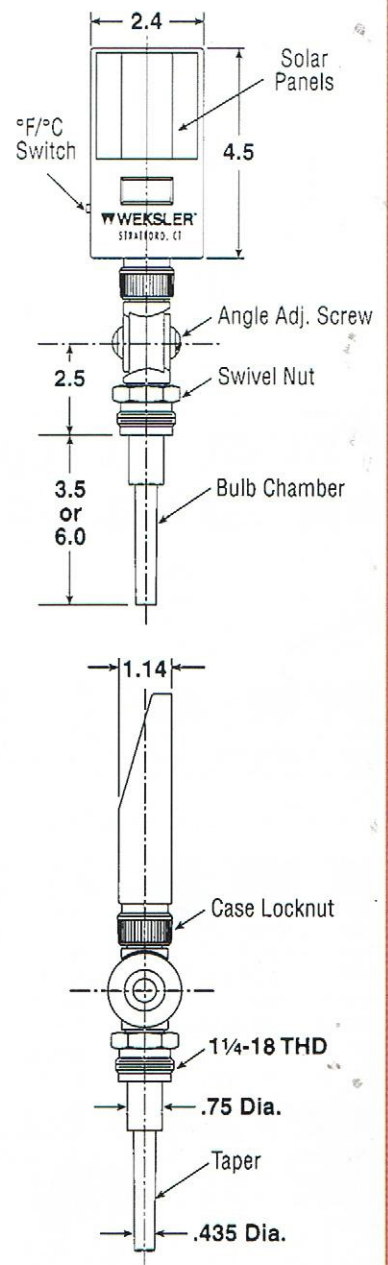

### How to Order Example: AD35AFC

MODEL TYPE	STEM LENGTH	CONNECTION LOCATION	RANGE
AD = Adjust Angle Digital Thermometer	35 = 3½" Stem 60 = 6" Stem	A = Adjust Angle	FC = Switchable Range -40/300°F or -40/150°C